



LEDALITE

by  Signify



Linear

EyeLine
suspended & wall




Make the room
the view

EyeLine... make your space a destination.

Stylishly sophisticated, boldly dramatic... **Ledalite EyeLine** is sure to make a statement in any architectural space. Horizontally ultra-thin linear light panels make **EyeLine** appear weightless, and so utterly organic that it becomes a natural design element of the built environment. Providing gentle, glare free illumination, **EyeLine** will startle you with its robust performance, while allowing you to maximize row spacing in large open plan areas, and keep energy densities to a minimum.

Make your room the view with **EyeLine**.

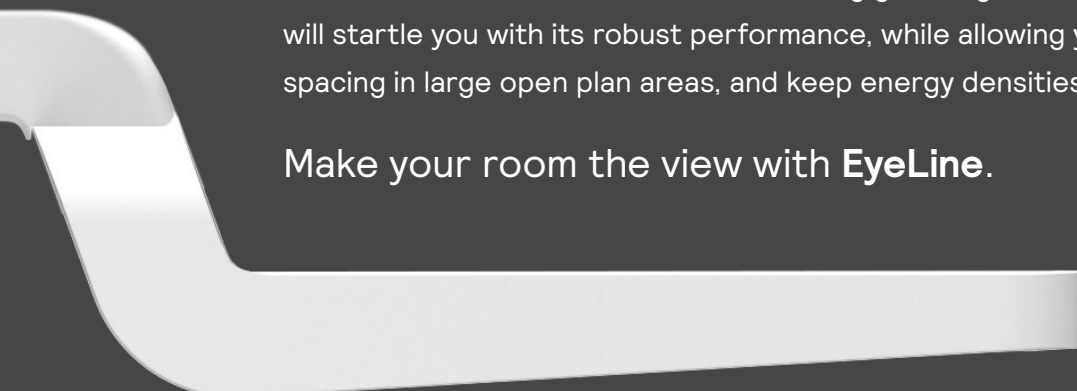

DESIGN
AWARD
2018






Simple elegance with EyeLine




Low-glare comfort with EyeLine

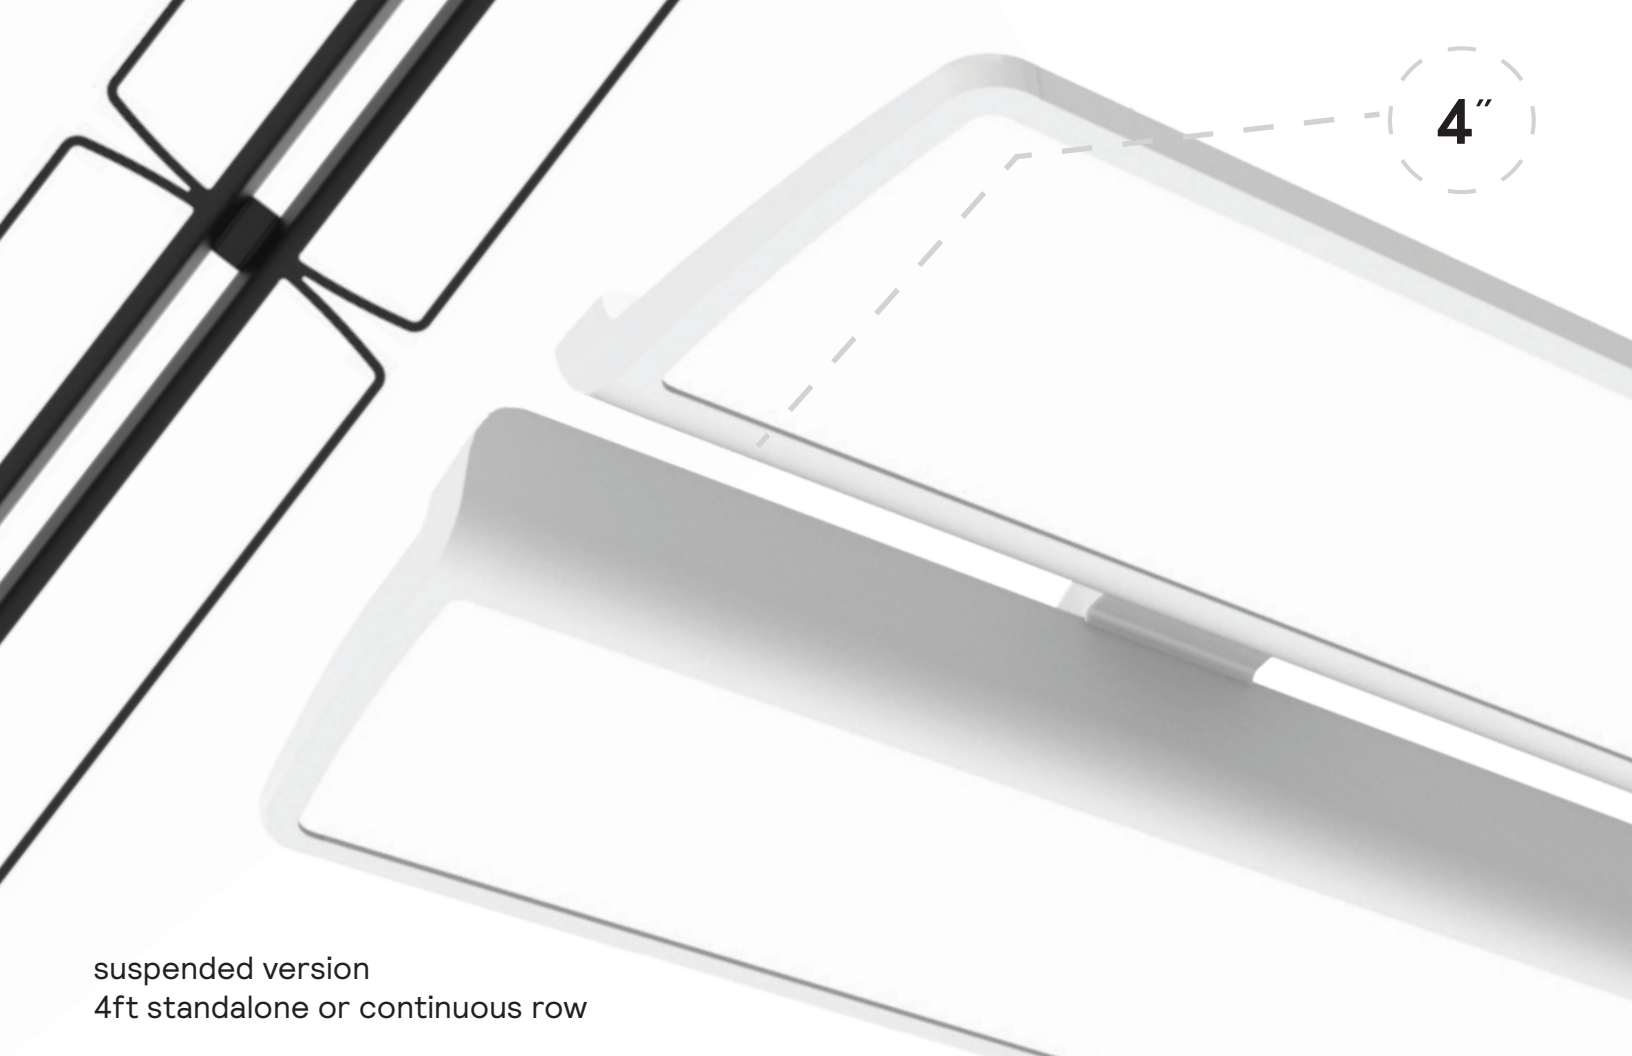

suspended version
4ft standalone or continuous row

wall version

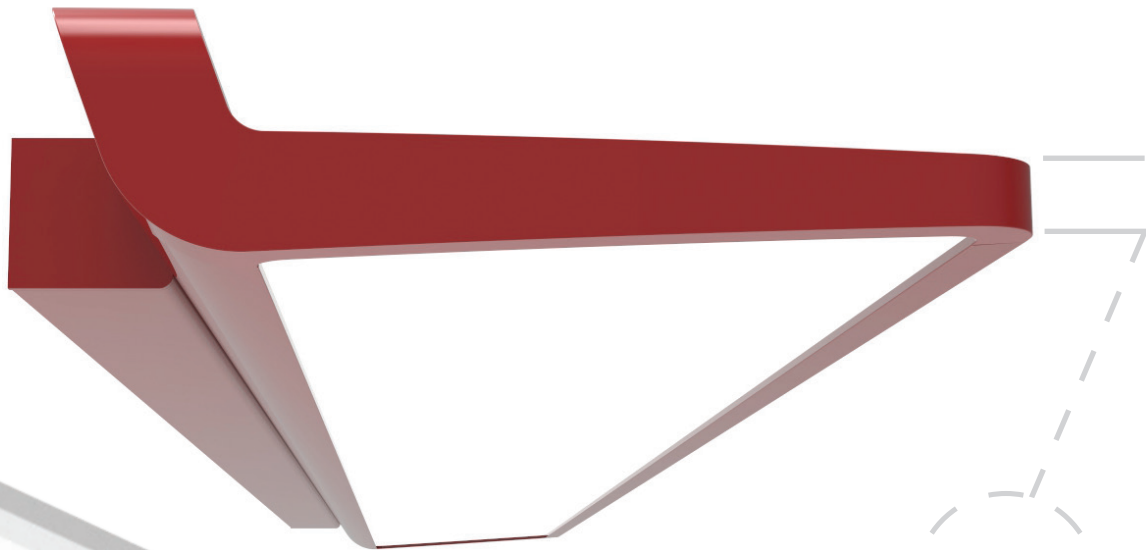

0.5"

Luxurious design with **EyeLine**



Modern meeting rooms with EyeLine






Types: suspended & wall mount,
direct/indirect

Lengths: 4ft modules & continuous row

Color temps: 3000, 3500, 4000K
80 & 90 CRI

Outputs: 3400lm (25W)
4800lm (36W)
6800lm (54W)




Distributions: 65%up/35%down
20%up/80%down
100%down

Controls: SpaceWise DT

Efficacy: up to 133LPW

Finishes: white, red (gloss),
grey, black

Spacing: 12–20ft o.c.

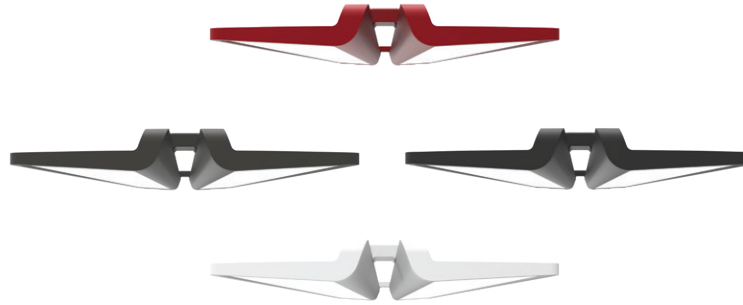

EyeLine suspended & wall

Family	Ceiling Type	Mount Type	Source	CRI/Color Temp ¹	Lumens ¹	Optics	Distribution ¹	Run Length	Voltage ³
EL EyeLine	G T-Grid C Chicago T-Grid D Drywall S Open Structure	S Suspended	L LED	840 80CRI, 4000K 835 80CRI, 3500K 830 80CRI, 3000K 935 90CRI, 3500K	68 6800 lm/4ft 48 4800 lm/4ft 34 3400 lm/4ft	Q Symmetric MesoOptics Lens	N 65% Up / 35% Dn G 20% Up / 80% Dn J 100% Dn	04 4ft XX Total run length	D 120/277V Dual 3 347V
		W Wall			48 4800 lm/4ft 34 3400 lm/4ft 24 2400 lm/4ft	W Asymmetric MesoOptics Lens			
Driver	Circuit	EM Option ^{2,3,4}	Sensors	Fixture Color ⁵	Power Cord Color	Cable Drop Length	Ceiling Mount		
E Advance 0-10v (1% dim) S Advance SR (5% dim)	R 1 Circuit, Remote Driver	N No Option E EM Wiring Ready B EM Batt. Pack	NN No Integral Sensor SZ SpaceWise DT Sensor	W White B Black R Racing Red G Graphite Grey C Custom	W White B Black	04 4ft 08 8ft 12 12ft 20 20ft	R1 Drywall 08 Surface/Structure/Hard Ceiling R5 T-Grid 24" Span Mount R6-1* On-Grid 15/16" non-regular R6-2* On-Grid 9/16" non-regular R6-3* On-Grid 9/16" 5/16" regular		

¹ Nominal values within a range. Consult photometry data for color temp, lumens & distribution of chosen configuration.

² Not all wiring types are available with all configurations. Consult Ledalite for a complete list of available

³ 347V not available with EM Batt. Packs, Advance SR drivers, or SpaceWise DT sensors

⁴ EM Batt. Pack not available with Drywall Ceiling

⁵ All fixture colors, other than White result in a reduced fixture efficacy between 5-20%

