


# Vesta Y

Y SHAPED CHANDELIER

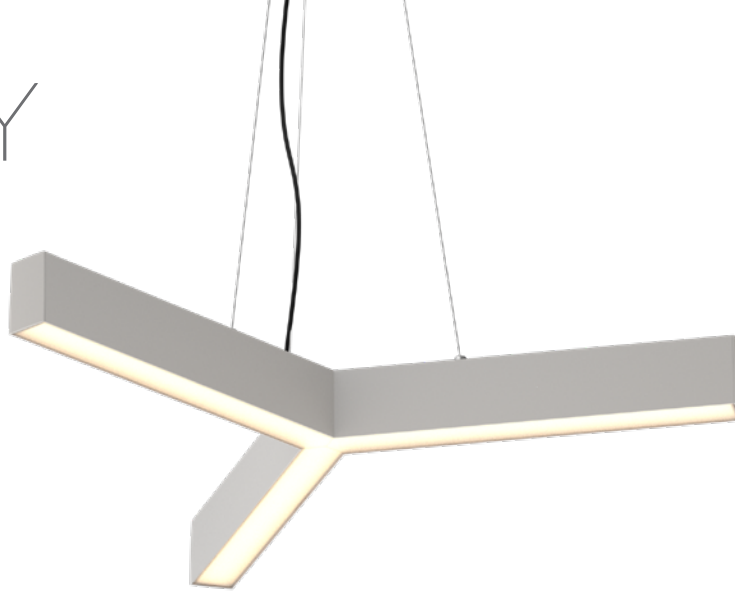

**Vesta Y - Y Shaped Chandelier.** Vesta Y is a standalone chandelier based on our Vesta linear system. The three stems create beautiful direct and indirect light throughout a space. Sturdy, Canadian made construction means that Vesta Y will remain a timeless part of your design.

|         |                      |                      |                      |                      |                      |                      |                      |
|---------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| Fixture | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |
|         | 1                    | 2                    | 3                    | 4                    | 5                    | 6                    | 7                    |
| Driver  | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |
|         | 1                    | 2                    | 3                    | 4                    | 5                    | 6                    | 7                    |

## Product Specifications

**SAMPLE :** Fixture **VC1Y-90-27-F-30-20-01** | Driver **STD-120-956-01-01-06**

| 1 - Model                     | 2 - CRI         | 3 - CCT           | 4 - Lens                     | 5 - Direct Lm          | 6 - Indirect Lm        |
|-------------------------------|-----------------|-------------------|------------------------------|------------------------|------------------------|
| <b>VC1Y</b> • Direct          | <b>90</b> • 90+ | <b>27</b> • 2700K | <b>F</b> • Frosted Symmetric | <b>30</b> • 3000 (32W) | <b>20</b> • 2000 (19W) |
| <b>VC2Y</b> • Direct/Indirect |                 | <b>30</b> • 3000K |                              | <b>40</b> • 4000 (44W) | <b>26</b> • 2600 (27W) |
|                               |                 | <b>35</b> • 3500K |                              | <b>XX</b> • Custom     | <b>00</b> • None       |
|                               |                 | <b>40</b> • 4000K |                              |                        | <b>XX</b> • Custom     |

| 7 - Finish            | 1 - Driver                                    | Dim Level | Dim Level                                    | 2 - Voltage                    |
|-----------------------|---|-----------|--|--------------------------------|
| <i>Standard</i>       | <b>STD/LCS</b> • 0 - 10 Volt dim option incl. | 1%        | <b>LUT2W</b> • 2 Wire for phase <sup>1</sup> | <b>120</b> • 120V              |
| <i>Premium</i>        | <b>ELDOLC</b> • EldoLED 0 - 10 Volt           | 0.1%      | <b>LUT5S</b> • 5 Series Eco System           | <b>277</b> • 277V              |
| <b>01</b> • White     | <b>DALI</b> • Dali Protocol                   | 0.1%      | <b>DMX</b> • SENSO                           | <b>347</b> • 347V <sup>2</sup> |
| <b>02</b> • Black     | <b>LUTES</b> • Hilume Ecodigital              | 1%        | <b>CSMB</b> • Casambi Wireless Control       |                                |
| <b>03</b> • Charcoal  |   |           |  |                                |
| <b>08</b> • Silver    |   |           |  |                                |
| <b>XX</b> • RAL       |   |           |  |                                |
| <b>52</b> • Mocha     |   |           |  |                                |
| <b>53</b> • Charcoal  |   |           |  |                                |
| <b>54</b> • Cerulean  |   |           |  |                                |
| <b>55</b> • Firebrick |   |           |  |                                |

| 3 <sup>3</sup> - Canopy Style           | 4 - Canopy Color   | 5 - Feed Color     | 6 - Suspension Height |
|---|--------------------|--------------------|-----------------------|
| <b>958</b> • Unified Round (3 aircraft) | <b>01</b> • White  | <b>01</b> • White  | <b>06</b> • 6'        |
|   | <b>02</b> • Black  | <b>02</b> • Black  | <b>XX</b> • Custom    |
|   | <b>08</b> • Silver | <b>03</b> • Clear  |                       |
|   |                    | <b>XX</b> • Custom |                       |

<sup>1</sup> 120V only

<sup>2</sup> Not available in Eldo, Lutron and DMX

<sup>3</sup> See page two for more details

Project : \_\_\_\_\_

Quantity : \_\_\_\_\_

Type : \_\_\_\_\_

Notes : \_\_\_\_\_

## Light Engine


- High Efficacy:** Up to 100 lumen/Watt
- Color Options (CCT):** 2700K, 3000K, 3500K, 4000K
- Color Consistency:** 3-step MacAdam Ellipse
- Color Rendering (CRI):** 90+
- Lumen Maintenance:** 100,000 hours (L-70 @ 25° C)

## Dimming

- Protocol:** 0-10V  
DALI  
LUTRON  
DMX
- Level:** From 0.1% to 10%

The Vesta Y combines high output with limitless possibilities of control. Dimming down to 0.1% is also available in Lutron (120-277V) and Dali systems (120-277V).

## Light Distribution

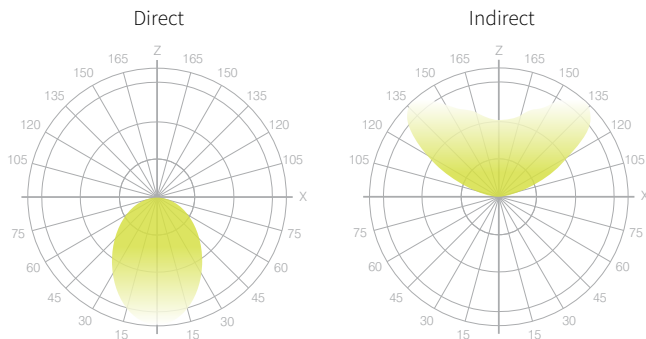


## Installation

- Suspended using aircraft cable. Fully height adjustable
- Factory assembled for easy and fast installation
- Electrical wire and aircraft cable included

## Construction

- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Aluminum extruded housing
- Made in Canada

## Dimensions

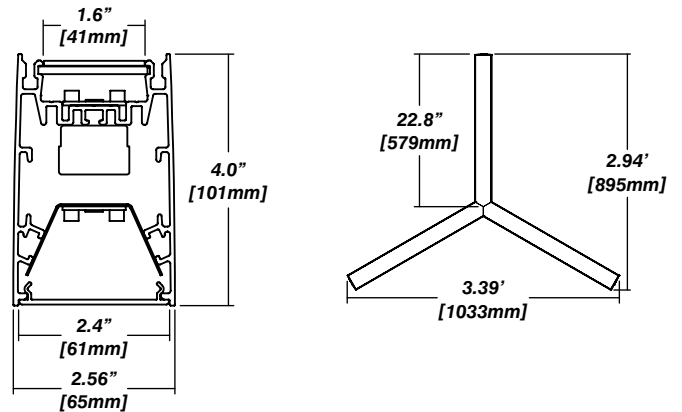

## Canopy

- Unified canopy combines feed cable and 3 aircraft cable
- Fully covers standard electrical box

Unified Round Canopy  
Ø7.75" [197mm]

