



1 x 4 Surface Lenticular Optic

MELLOW LIGHT
evolution / infinity – Lenticular Optic

- MELLOW LIGHT infinity (two channels) – the brilliant direct light component and gentle lighting wings can be controlled separately
- MELLOW LIGHT evolution (single channel) – direct light component and lighting wings are controlled together
- Diffused side sections for pleasant ambient lighting
- Similar to daylight: gentle, glare-free light distribution without any distracting harsh shadows
- Well-balanced illumination of work plane, walls and ceilings for a bright, open room atmosphere
- Lenticular Diffuser Optic offers a softer distribution with prism louvers

IBEW UNION MADE

DELIVERED LUMENS	COLOR TEMPERATURE	COLOR RENDERING	WATTS	UGR
3458 lm	3000 K 3500 K 4000 K (MacAdam 3 Step)	CRI 80+	34 W	< 19

Designed in collaboration with Gensler




Suitable for Damp Locations

Order Code

1	14	SM	3400	AL	6	7	8	9
---	----	----	------	----	---	---	---	---



- | | | |
|---|------------|---|
| 1 | FIXTURE | MLEVO MELLOW LIGHT evolution (Single Channel) MLINF MELLOW LIGHT infinity (Two Channels) |
| 2 | SIZE | 14 1' x 4' |
| 3 | CEILING | SM Surface Mounted |
| 4 | LUMENS | 3400 3458 Lumens |
| 5 | OPTICS | AL Lenticular Diffuser Optic for softer distribution across the center section |
| 6 | CRI/CCT | 830 80 CRI 3000 K 835 80 CRI 3500 K 840 80 CRI 4000 K |
| 7 | DRIVER | DU 0-10V 120/277V, 1% DD Dali 120/277V, 1% LA Lutron 120/277V, 1% CU 0-10V 347V, 1% |
| 8 | END FINISH | SR Silver WH White BZ Bronze BK Black RA Raw Aluminum |

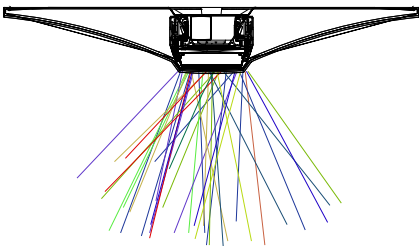

Edge lit surface with Lenticular Diffuser Optic

Light Distribution

Dimensions

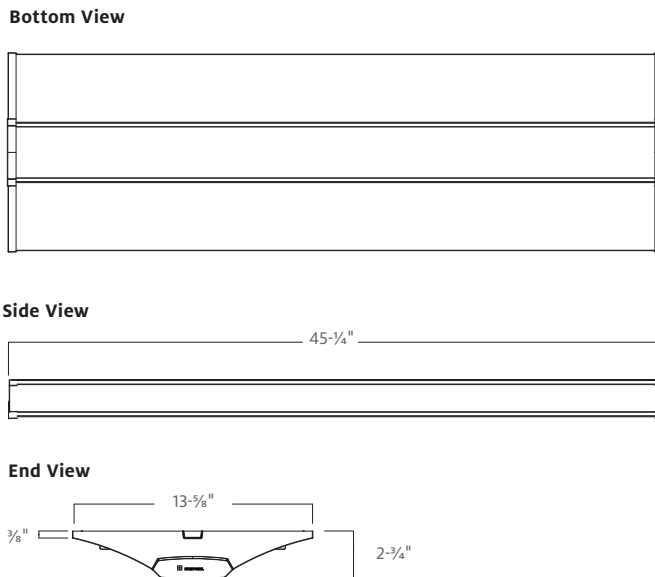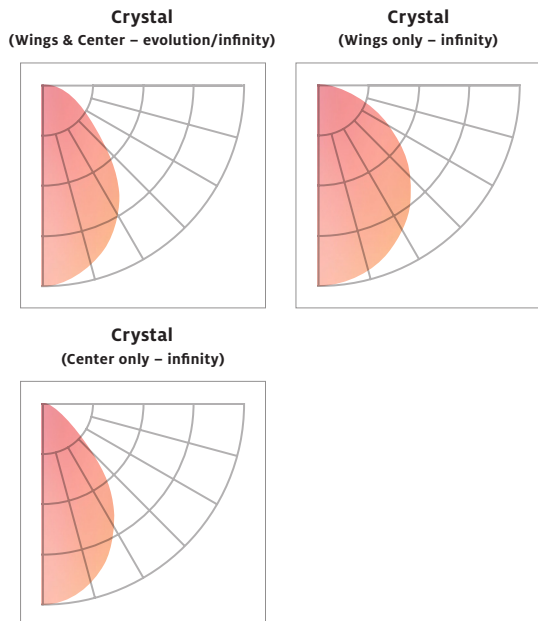

Photometric Performance

Size	Fixture	Lumen Output	Switching Logic	3400 lm	Watts	lm/W	4400 lm	Watts	lm/W
1x4	MLEVO	AA	N/A	3196	34	89	4606	49	94
		AL	N/A	3458	34	102	N/A	N/A	N/A
	MLINF	AA	Center	1556	17	92	2151	24	90
			Wings	1556	17	92	2261	25	90
			Wings & Center	3049	34	90	4394	49	90
	AL	Center	1689	17	99	N/A	N/A	N/A	N/A
		Wings	1689	17	99	N/A	N/A	N/A	N/A
Wings & Center		3378	34	99	N/A	N/A	N/A	N/A	

Multipliers

CCT and CRI		
CRI	CCT	Multiplier
80	3000	1.00
	3500	1.00
	4000	1.00

Technical Detail

1) Construction: The housing is made of 20 gauge cold-rolled steel with high reflectance micro cellular formed polyester white interior. Its white finish is post powdercoated. A right angle access plate allows the unit to be fed from the top. A knock out in the endcap allows for continuous feed.

2) Wattage and CCT: The unit is available in 31 W with 3458 lumens and in 3000 K, 3500 K, or 4000 K color temperatures with CRI 80+.

3) Optics: A center optic chamber with acrylic cover and curved side diffusers illuminates the fixture. The acrylic lens provides softer, and more diffused illumination.

4) Driver: The unit is available with 120/277V 0-10V driver(s), DALI driver and Lutron driver with 1% dimming. For non-dimming installations, cap off the two control wires on each driver and connect the hot/neutral and ground as normal.

5) Mounting: The unit mounts to ceiling using four screws with anchors provided by the customer and the fender washer included.

6) Life: 50,000 hours rated life. L70.

7) Weight: The unit's weight is summarized in below table based on the model.

MLEVO	17.5 lbs
MLINF	19 lbs